




Centra-Inochi Extreme Pit Shop Corporation

12 L. Fernandez St. Balintawak, Quezon City
 Phone/Fax: (632) 364 57 22; (632) 412 33 48
 www.inochi.com.ph
 sales@inochi.com.ph


INOCHI 1250 (12V 5Ah)

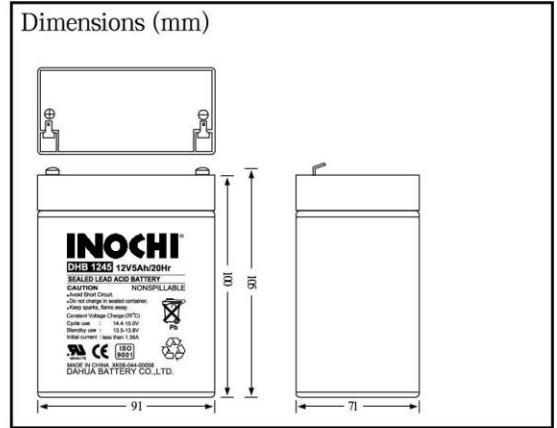

Specifications

| | | |
|------------------------------|----------------------------------|-------------------------|
| Nominal Voltage | | 12V |
| Rated Capacity(20 hour rate) | | 5AH |
| Dimensions ± 1mm | Length | 91mm(3.58") |
| | Width | 71mm(2.80") |
| | Height | 100mm(3.94") |
| | Total Height (with terminals) | 105mm(4.13") |
| Weight | | Approx.1.60kg (3.53lbs) |
| Standard Terminal | | F 1 |
| Optional Terminal | | F2 |

Discharge Characteristics(20°C,68°F)

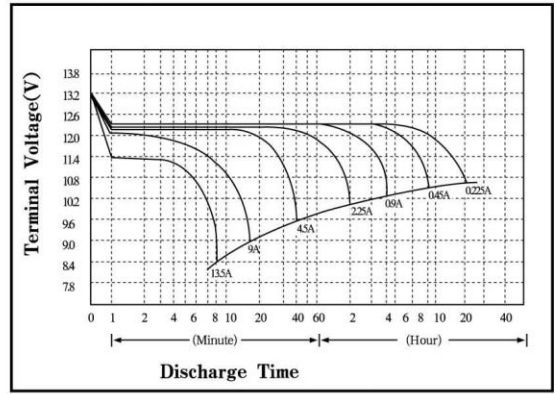

Electrical Specifications

| | | |
|-------------------------------|-------------------------------------|-------|
| Capacity 77°F(25°C) | 20 hour rate (225mA) | 5AH |
| | 10 hour rate (420mA) | 4.5AH |
| | 5 hour rate (760mA) | 4.2AH |
| | 1 hour rate (2.6A) | 2.8AH |
| Internal Resistance | Fully charged battery 77°F(25°C) | 35m Ω |
| Capacity | 104°F(40°C) | 102% |
| Affected by | 77°F(25°C) | 100% |
| Temperature (20 hour rate) | 32°F(0°C) | 85% |
| | 5°F(-15°C) | 65% |
| Self-Discharge 77°F(25°C) | Capacity after 3 month storage | 92% |
| | Capacity after 6 month storage | 83% |
| | Capacity after 12 month storage | 65% |

Discharge Characteristics(0°C/32°F,40°C/104°F)

