




Centra-Inochi Extreme Pit Shop Corporation

12 L. Fernandez St. Balintawak, Quezon City
 Phone/Fax: (632) 364 57 22; (632) 412 33 48
 www.inochi.com.ph
 sales@inochi.com.ph


INOCHI 12550 (12V 55Ah)

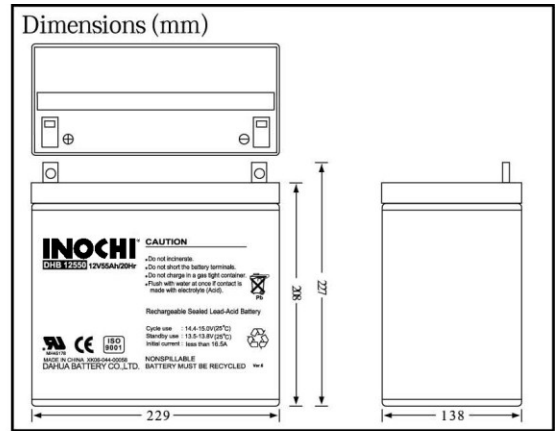

Specifications

Nominal Voltage	12V	
Rated Capacity(20 hour rate)	55AH	
Dimensions ± 1mm	Length	229mm(9.02")
	Width	138mm(5.43")
	Height	208mm(8.19")
	Total Height (with terminals)	227mm(8.94")
Weight	Approx.19.10kg (42.11lbs)	
Standard Terminal	A4	
Optional Terminal	B2	

Discharge Characteristics(20°C,68°F)

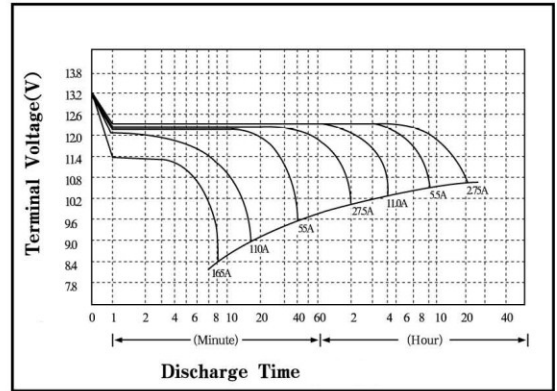

Electrical Specifications

Capacity 77°F(25°C)	20 hour rate (2.75A)	55AH
	10 hour rate (5.12A)	51.2AH
	5 hour rate (9.36A)	46.8AH
	1 hour rate (31.4A)	31.4AH
Internal Resistance	Fully charged battery 77°F(25°C)	11m Ω
Capacity Affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge Constant Voltage	Cycle:Initial Charging Current less than16.5A Voltage14.4-15.0V77°F(25°C) Standby:Voltage13.5-13.8V77°F(25°C)	

Discharge Characteristics(0°C/32°F,40°C/104°F)

