




**Centra-Inochi Extreme Pit Shop Corporation**

12 L. Fernandez St. Balintawak, Quezon City  
 Phone/Fax: (632) 364 57 22; (632) 412 33 48  
 www.inochi.com.ph  
 sales@inochi.com.ph


**INOCHI 12700 (12V 70Ah)**

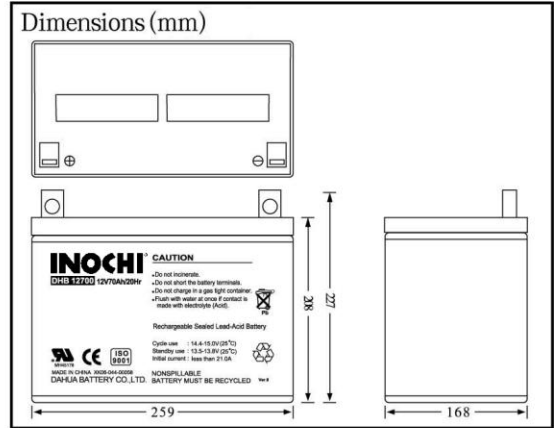

**Specifications**

Nominal Voltage		12V
Rated Capacity(20 hour rate)		70AH
Dimensions ± 1mm	Length	259mm(10.20")
	Width	168mm(6.61")
	Height	211mm(8.19")
	Total Height (with terminals)	234mm(8.94")
Weight		Approx.28kg (61.73lbs)
Standard Terminal		A4
Optional Terminal		B2

**Discharge Characteristics(20°C,68°F)**

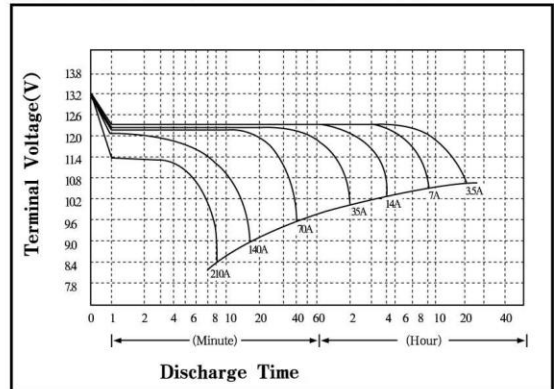

**Electrical Specifications**

Capacity 77°F(25°C)	20 hour rate (3.5A)	70AH
	10 hour rate (6.51A)	65.1AH
	5 hour rate (11.9A)	59.5AH
	1 hour rate (39.9A)	39.9AH
Internal Resistance	Fully charged battery 77°F(25°C)	10m Ω
Capacity Affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge Constant Voltage	Cycle:Initial Charging Current less than21.0A Voltage14.4-15.0V77°F(25°C) Standby:Voltage13.5-13.8V77°F(25°C)	

**Discharge Characteristics(0°C/32°F,40°C/104°F)**

