




**Centra-Inochi Extreme Pit Shop Corporation**

12 L. Fernandez St. Balintawak, Quezon City  
 Phone/Fax: (632) 364 57 22; (632) 412 33 48  
 www.inochi.com.ph  
 sales@inochi.com.ph


**INOCHI 1272 (12V 7.2Ah)**

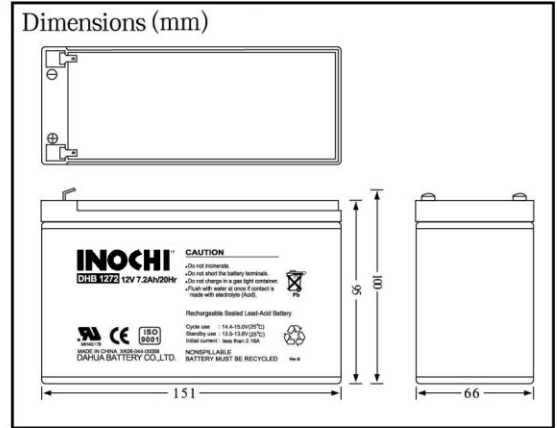

**Specifications**

Nominal Voltage		12V
Rated Capacity(20 hour rate)		7.2AH
Dimensions ± 1mm	Length	151mm(5.94")
	Width	66mm(2.60")
	Height	95mm(3.74")
	Total Height (with terminals)	100mm(3.94")
Weight		Approx.2.40kg (5.30lbs)
Standard Terminal		F 1
Optional Terminal		F2

**Discharge Characteristics(20°C,68°F)**

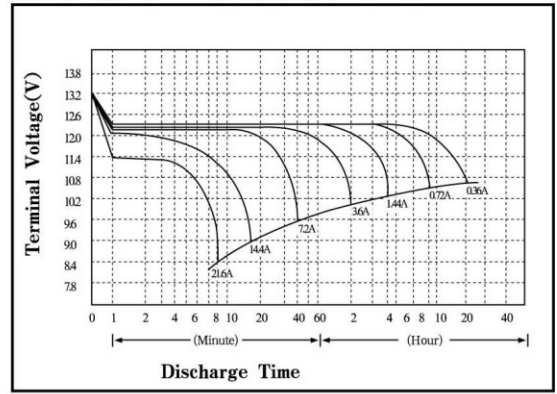

**Electrical Specifications**

Capacity 77°F(25°C)	20 hour rate (360mA)	7.2AH
	10 hour rate (670mA)	6.7AH
	5 hour rate (1.22A)	6.1AH
	1 hour rate (4.3A)	4.3AH
Internal Resistance	Fully charged battery 77°F(25°C)	24m Ω
Capacity Affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge Constant Voltage	Cycle:Initial Charging Current less than2.16A Voltage14.4-15.0V77°F(25°C) Standby:Voltage13.5-13.8V77°F(25°C)	

**Discharge Characteristics(0°C/32°F,40°C/104°F)**

