




Centra-Inochi Extreme Pit Shop Corporation

12 L. Fernandez St. Balintawak, Quezon City
 Phone/Fax: (632) 364 57 22; (632) 412 33 48
 www.inochi.com.ph
 sales@inochi.com.ph


INOCHI 1290 (12V 9Ah)

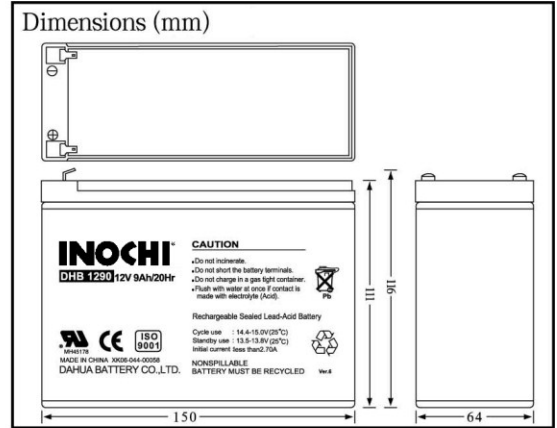

Specifications

Nominal Voltage	12V	
Rated Capacity(20 hour rate)	9AH	
Dimensions ± 1mm	Length	150mm(5.91")
	Width	64mm(2.52")
	Height	111mm(4.37")
	Total Height (with terminals)	116mm(4.57")
Weight	Approx.2.83kg (6.24lbs)	
Standard Terminal	F 1	
Optional Terminal	F2	

Discharge Characteristics(20°C,68 °F)

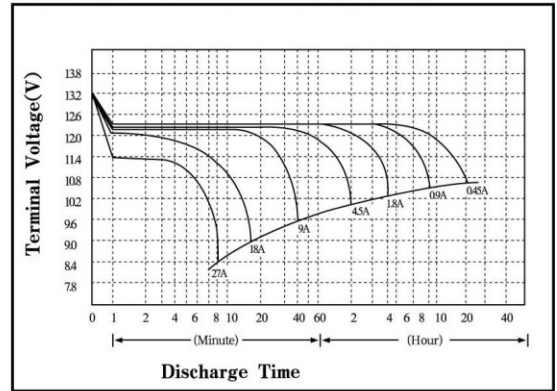

Electrical Specifications

Capacity 77°F(25°C)	20 hour rate (450mA)	9AH
	10 hour rate (840mA)	8.4AH
	5 hour rate (1.54A)	7.7AH
	1 hour rate (5.4A)	5.4AH
Internal Resistance	Fully charged battery 77°F(25°C)	16m Ω
Capacity Affected by Temperature (20 hour rate)	104°F(40°C)	102%
	77°F(25°C)	100%
	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge Constant Voltage	Cycle:Initial Charging Current less than2.70A Voltage14.4-15.0V77°F(25°C) Standby:Voltage13.5-13.8V77°F(25°C)	

Discharge Characteristics(0°C/32°F,40°C/104°F)

