




Centra-Inochi Extreme Pit Shop Corporation

12 L. Fernandez St. Balintawak, Quezon City
 Phone/Fax: (632) 364 57 22; (632) 412 33 48
 www.inochi.com.ph
 sales@inochi.com.ph


INOCHI 12900 (12V 90Ah)

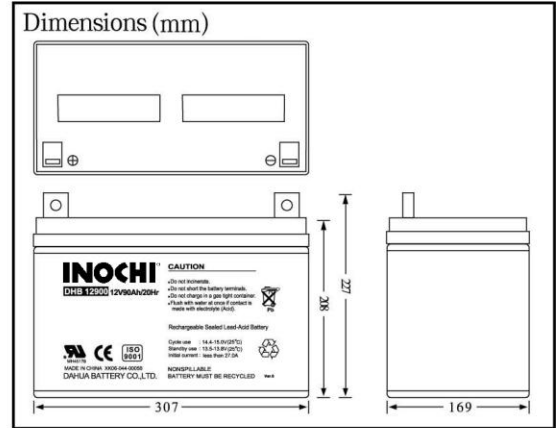

Specifications

Nominal Voltage		12V
Rated Capacity(20 hour rate)		90AH
Dimensions ± 1mm	Length	307mm(12.09")
	Width	169mm(6.65")
	Height	213mm(8.19")
	Total Height (with terminals)	234mm(8.94")
Weight		Approx.30.60kg(67.46lbs)
Standard Terminal		A4
Optional Terminal		B2

Discharge Characteristics(20°C,68°F)

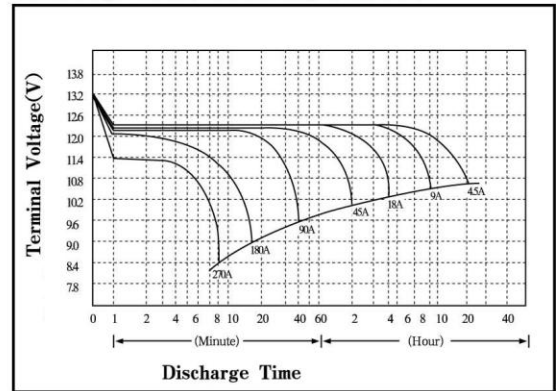

Electrical Specifications

Capacity 77°F(25°C)	20 hour rate (4.5A)	90AH
	10 hour rate (8.37A)	83.7AH
	5 hour rate (15.3A)	76.5AH
	1 hour rate (51.3A)	51.3AH
Internal Resistance	Fully charged battery 77°F(25°C)	8m Ω
Capacity	104°F(40°C)	102%
Affected by	77°F(25°C)	100%
Temperature (20 hour rate)	32°F(0°C)	85%
	5°F(-15°C)	65%
Self-Discharge 77°F(25°C)	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge Constant Voltage	Cycle:Initial Charging Current less than27.0A Voltage14.4-15.0V77°F(25°C) Standby:Voltage13.5-13.8V77°F(25°C)	

Discharge Characteristics(0°C/32°F,40°C/104°F)

